

Cable output length 2m:

Power:

One shielded class 6 cable coded 1,2,3 green/yellow square section and diameter depending of current see table

Thermal sensors:

One shielded class 6 cable (2x2x0,25mm²) overall ϕ 7


Brown-White : PTC

Green-Yellow : KTY84

Minimum bending radius (except for the first 50mm):

See Table

Cable	ϕ	R min.
4x1.5	8.6	103
4x2.5	10.8	130
4x4	12.2	147
4x6	14	168
4x10	17.6	211

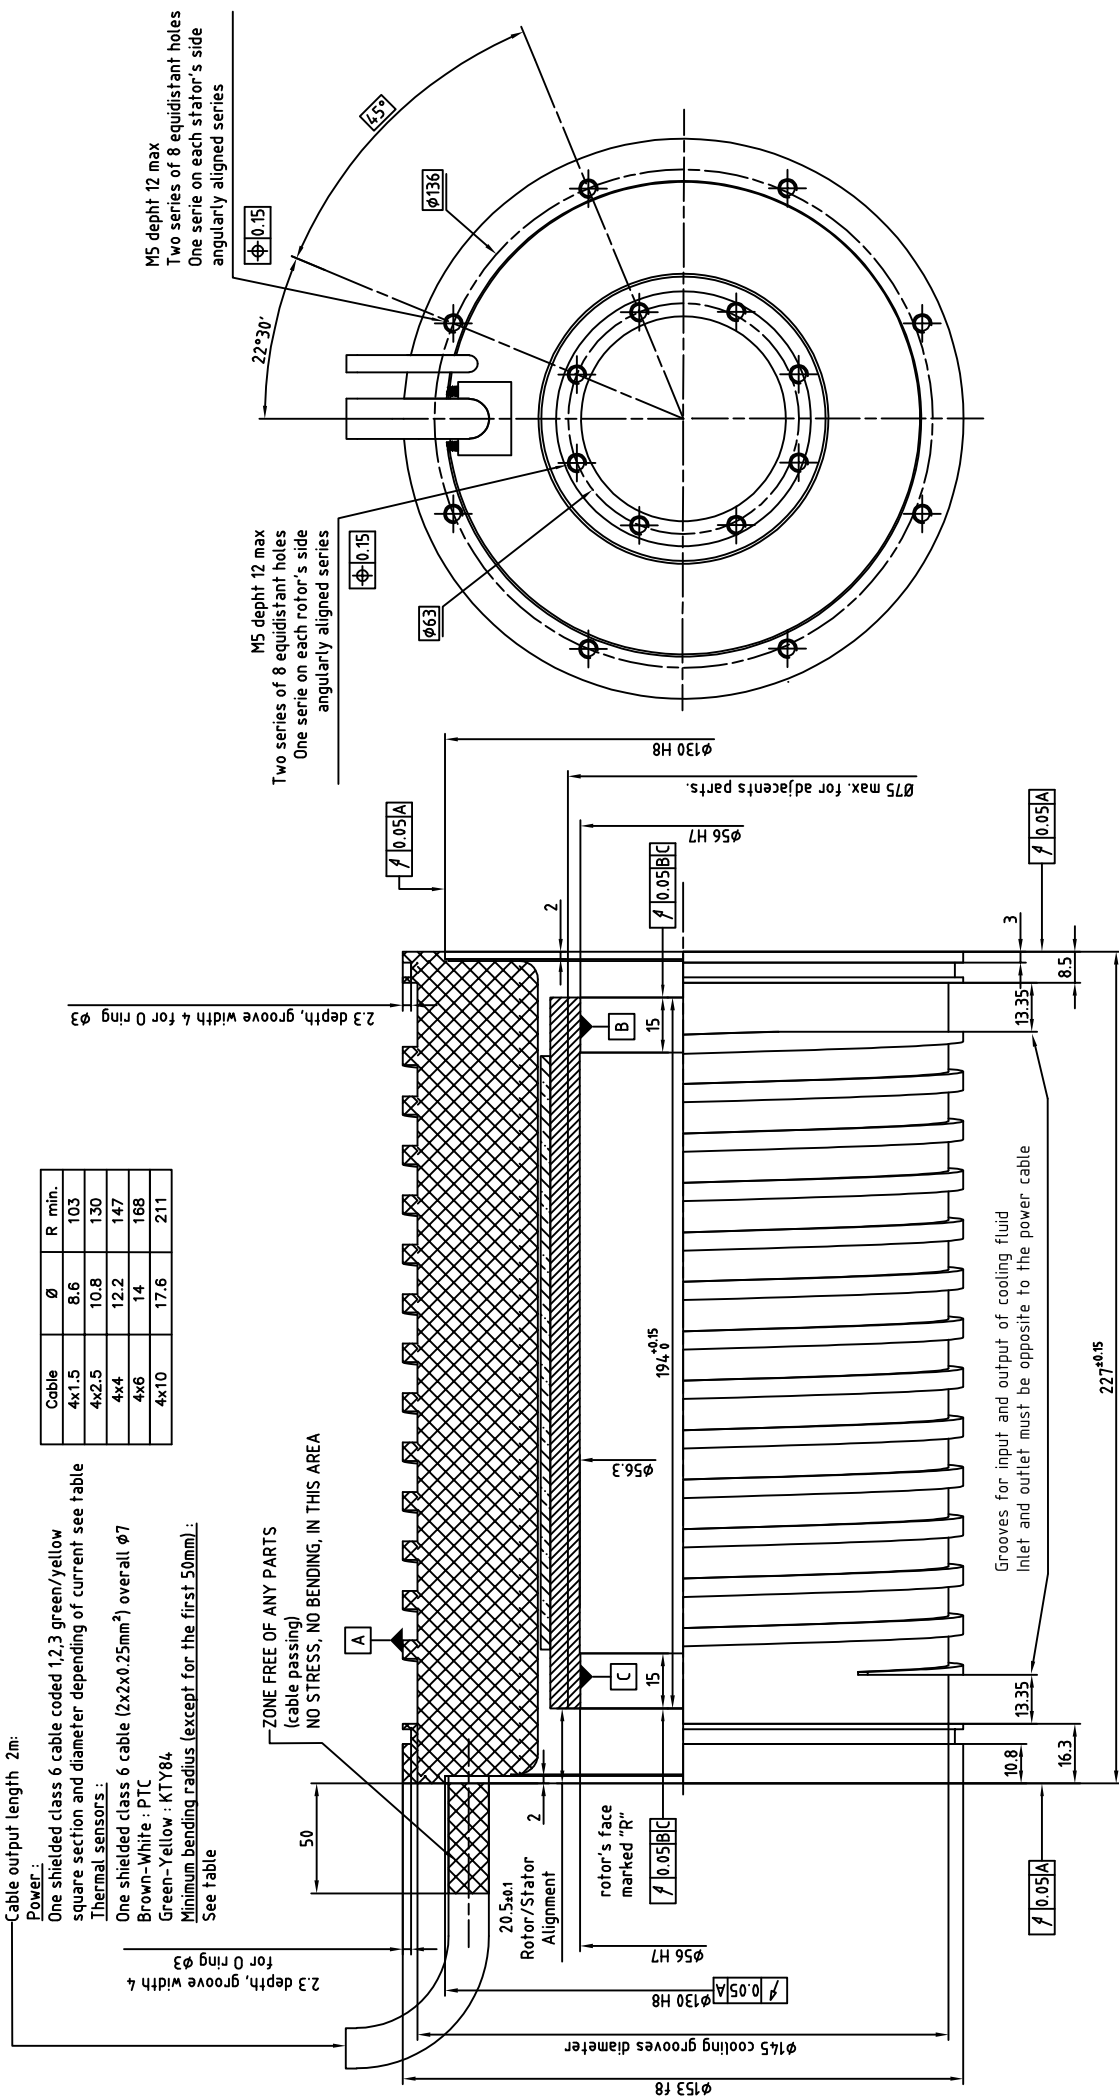

ALXION
 AUTOMATIQUE & PRODUCTIQUE
 Parc Technologique des Fossés Jean
 92712 COLOMBEES Cedex
 Tél: 014-1306304 - Fax: 014-1306136

145STK6M2XXXXXX

NOTA:
 Rotor is not fitted in the stator
 For more information about mounting see
 document 145STK0-WA002

CAUTION: For a better safety, it is recommended that the cooling fluid inlet would be made through the hose located on the side opposed to the cabling, while the cooling fluid outlet will be made by the one located on the cable side.