Cable output length 2m:

Power :

One shielded class 6 cable coded 1,2,3 green/yellow square section and diameter depending of current see table

Thermal sensors :

One shielded class 6 cable (2x2x0.25mm²) overall ⌀7

Brown-White : PTC

Green-Yellow : KTY84

Minimum bending radius (except for the first 50mm) :

See table

Cable	Ø	R min.
4x1.5	8.6	103
4x2.5	10.8	130
4x4	12.2	147
4x6	14	168
4x10	17.6	211

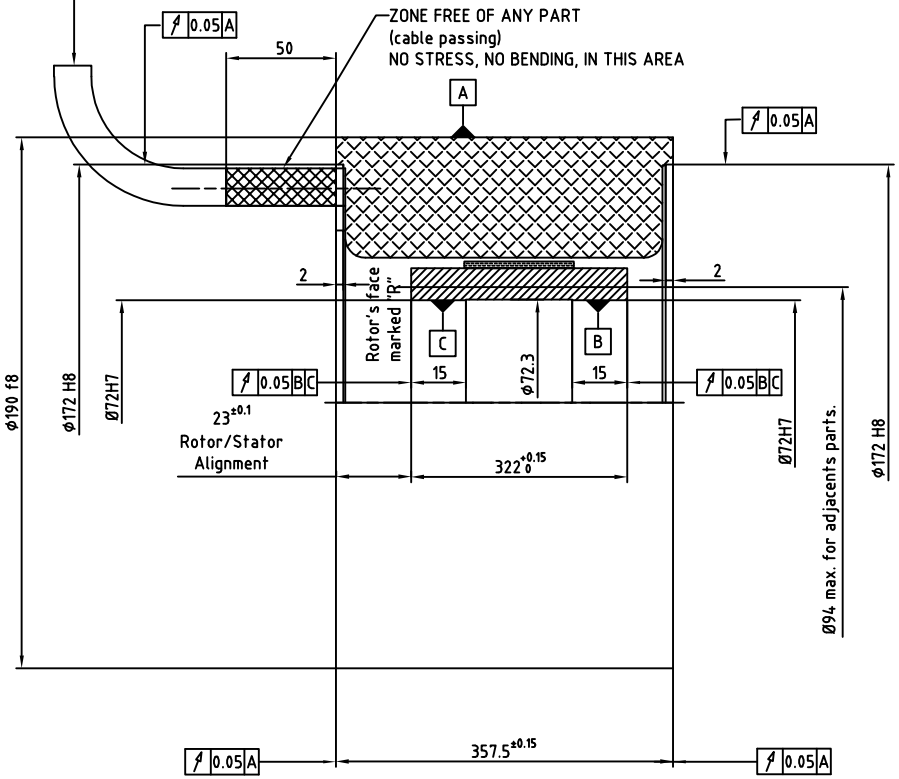

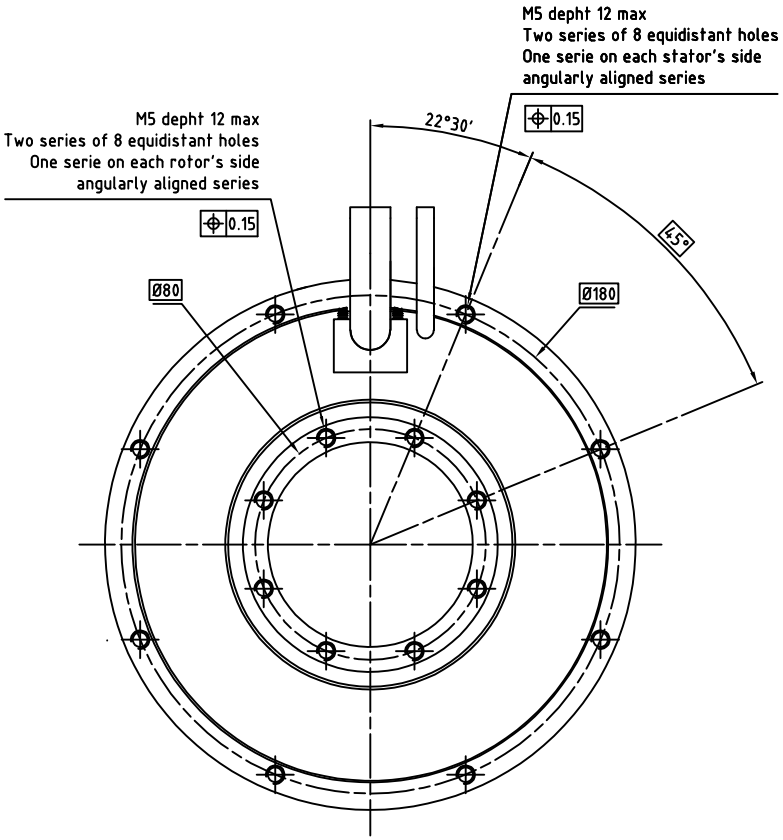

NOTA:
Rotor is not fitted in the stator
For more information about mounting see document 190STK0-WA002

ALXION

AUTOMATIQUE & PRODUCTIQUE
Parc Technologique des Fossés Jean
92712 COLOMBES Cedex
Tél: 0141306304 - Fax: 0141306136

190ATK8M1XXXXXX