Cable	Ø	R min.
4x1.5	8.6	103
4x2.5	10.8	130
4x4	12.2	147
4x6	14	168
4x10	17.6	211

Cable output length 2m:
Power :
One shielded class 6 cable coded 1,2,3 green/yellow
Thermal sensors :
One shielded class 6 cable (2x2x0.25mm²)
Brown-White : PTC
Green-Yellow : KTY84
Minimum bending radius (except for the first 50mm) :
See table

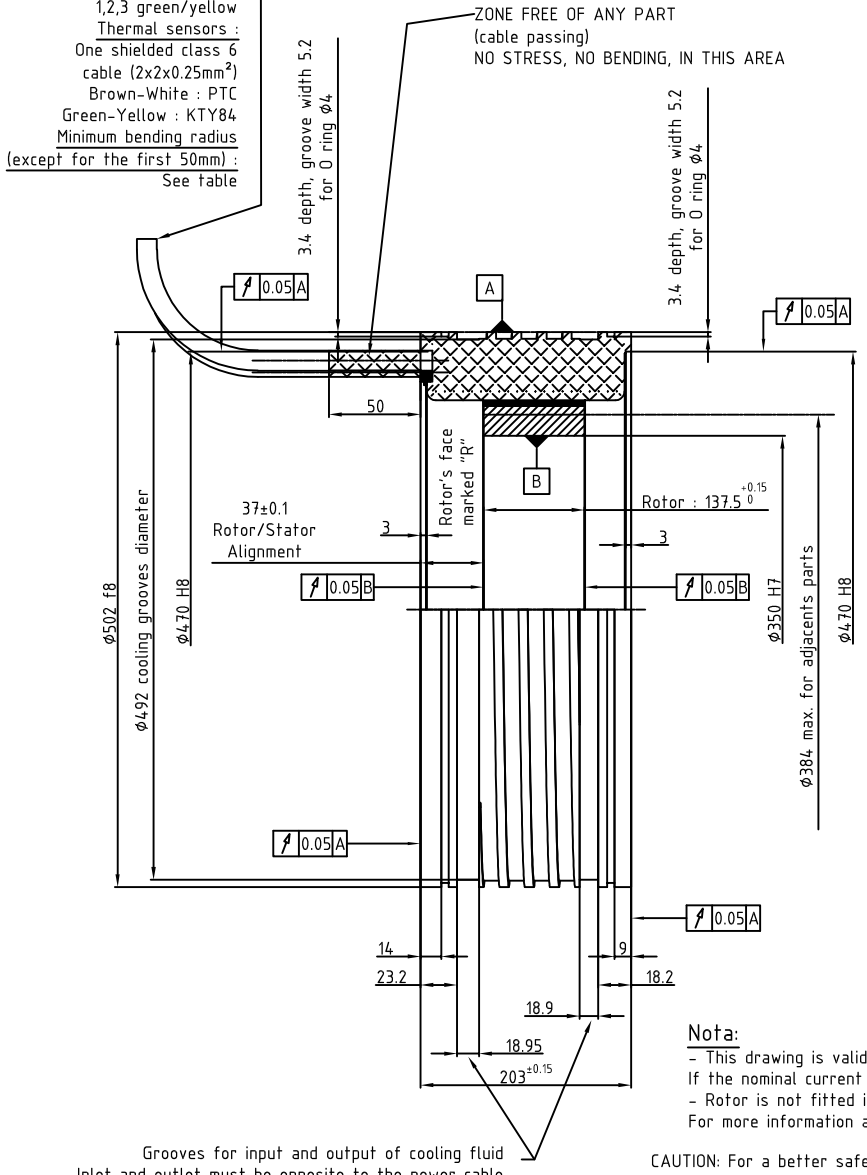

Grooves for input and output of cooling fluid
Inlet and outlet must be opposite to the power cable

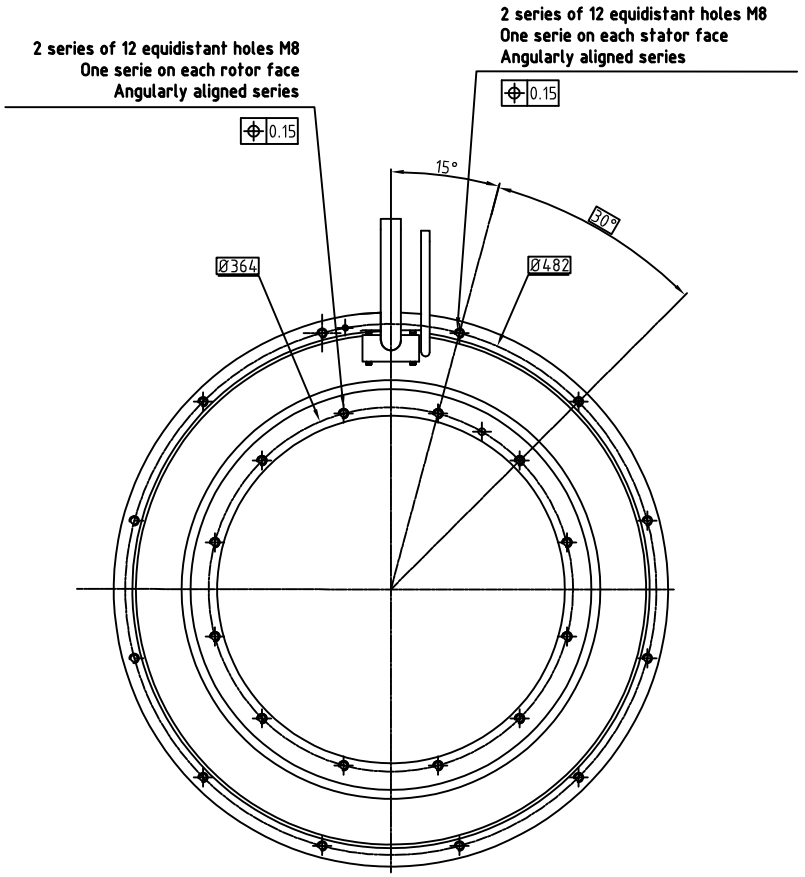

Nota:
- This drawing is valid only for motors with nominal current lower than 53 Amps. If the nominal current is greater than 53 Amps, please contact us.
- Rotor is not fitted in the stator
For more information about mounting see document 500STK0-WA002

CAUTION: For a better safety, it is recommended that the cooling fluid inlet would be made through the hose located on the side opposed to the cabling, while the cooling fluid outlet will be made by the one located on the cable side.

ALXION
AUTOMATIQUE & PRODUCTIQUE
Parc Technologique des Fossés Jean
92712 COLOMBES Cedex
Tél: 0141306304 - Fax: 0141306136

500STK5M2XXXXXX