
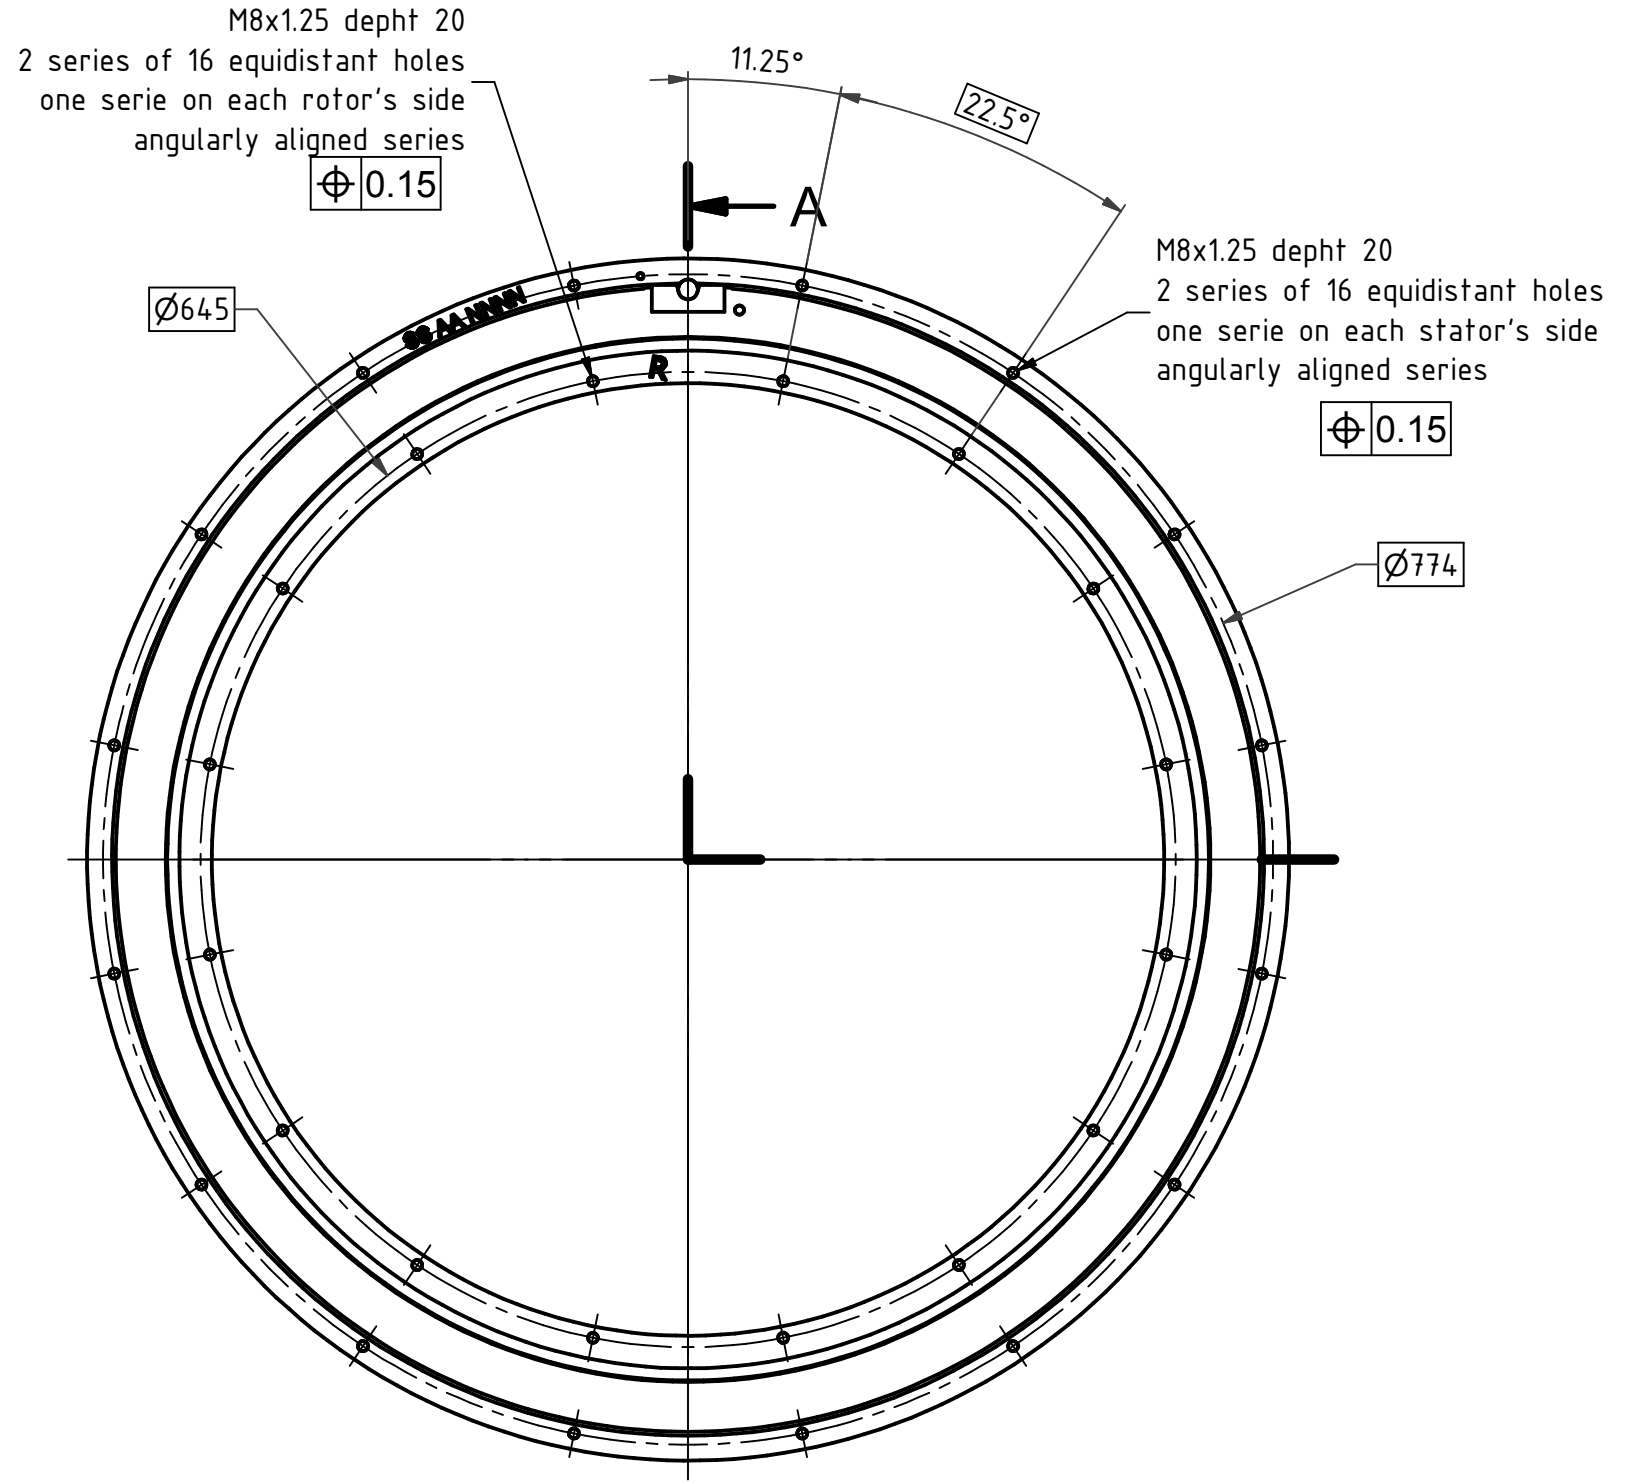


Cable output length 2m:
 Power :
 One shielded class 6 cable coded 1,2,3 green/yellow
 Thermal sensors :
 One shielded class 6 cable (2x2x0.25mm²)
 Brown-White : PTC
 Green-Yellow : KTY84
 Minimum bending radius (except for the first 50mm) :
 See table

Cable	Ø	R min.
2x2x0.25	7	84
4x1.5	8	96
4x2.5	9.6	115
4x4	11.1	135
4x6	13.4	160
4x10	16.7	200

ZONE FREE OF ANY PART
 (cable passing)
 NO STRESS, NO BENDING, IN THIS AREA

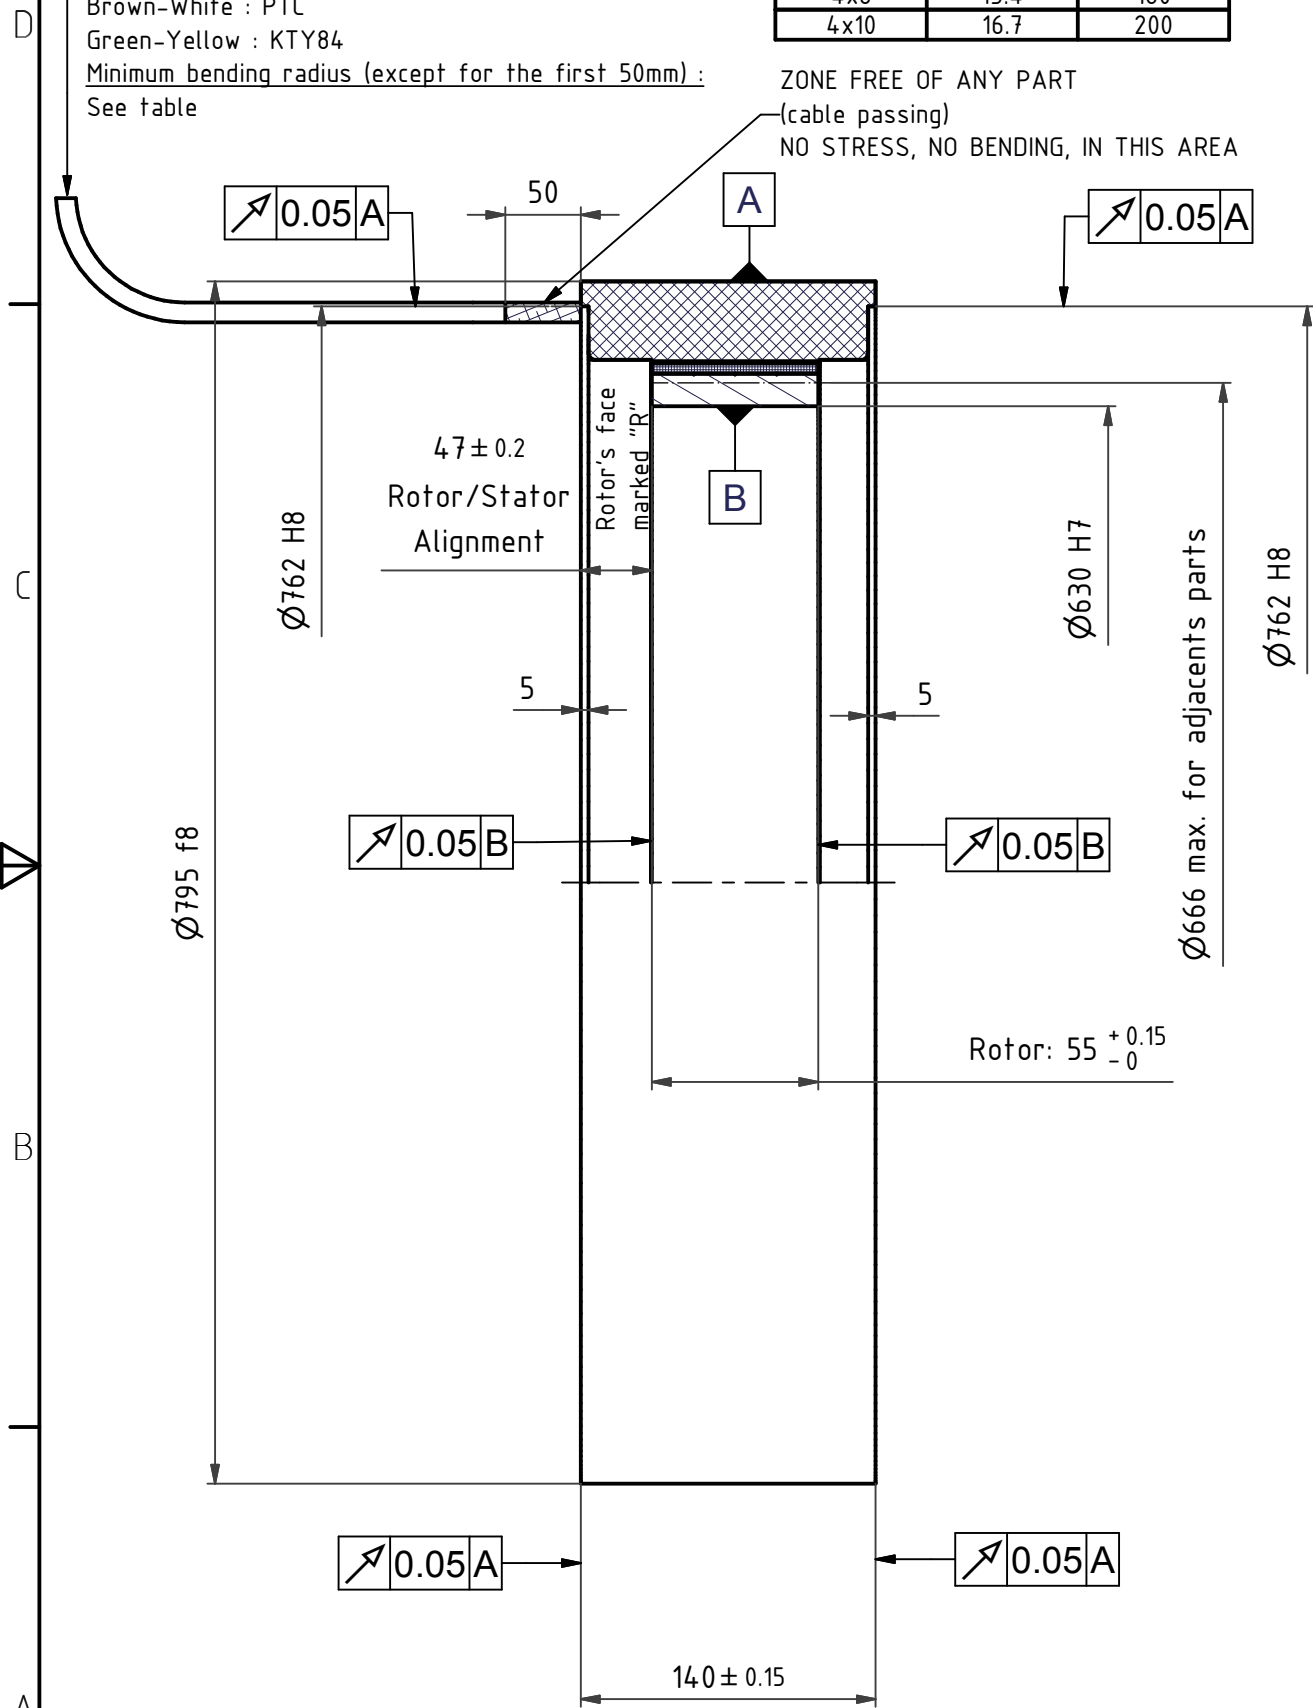

Nota:

This drawing is valid only for alternators with nominal current lower than 53 Amps.
 If the nominal current is greater than 53 Amps, please contact us.

ALXION
 AUTOMATIQUE & PRODUCTIQUE
 Parc Technologique "les Fossés Jean"
 92712 COLOMBES Cedex
 Tél: 0141306304 - Fax: 0141306136
800ATK2M1XXXXXX