Cable output length 2m:

Power :

One shielded class 6 cable coded 1,2,3 green/yellow

Thermal sensors :

One shielded class 6 cable (2x2x0.25mm²)

Brown-White : PTC

Green-Yellow : KTY84

Minimum bending radius (except for the first 50mm) :

See table

Cable	Ø	R min.
2x2x0.25	7	84
4x1.5	8	96
4x2.5	9.6	115
4x4	11.1	135
4x6	13.4	160
4x10	16.7	200

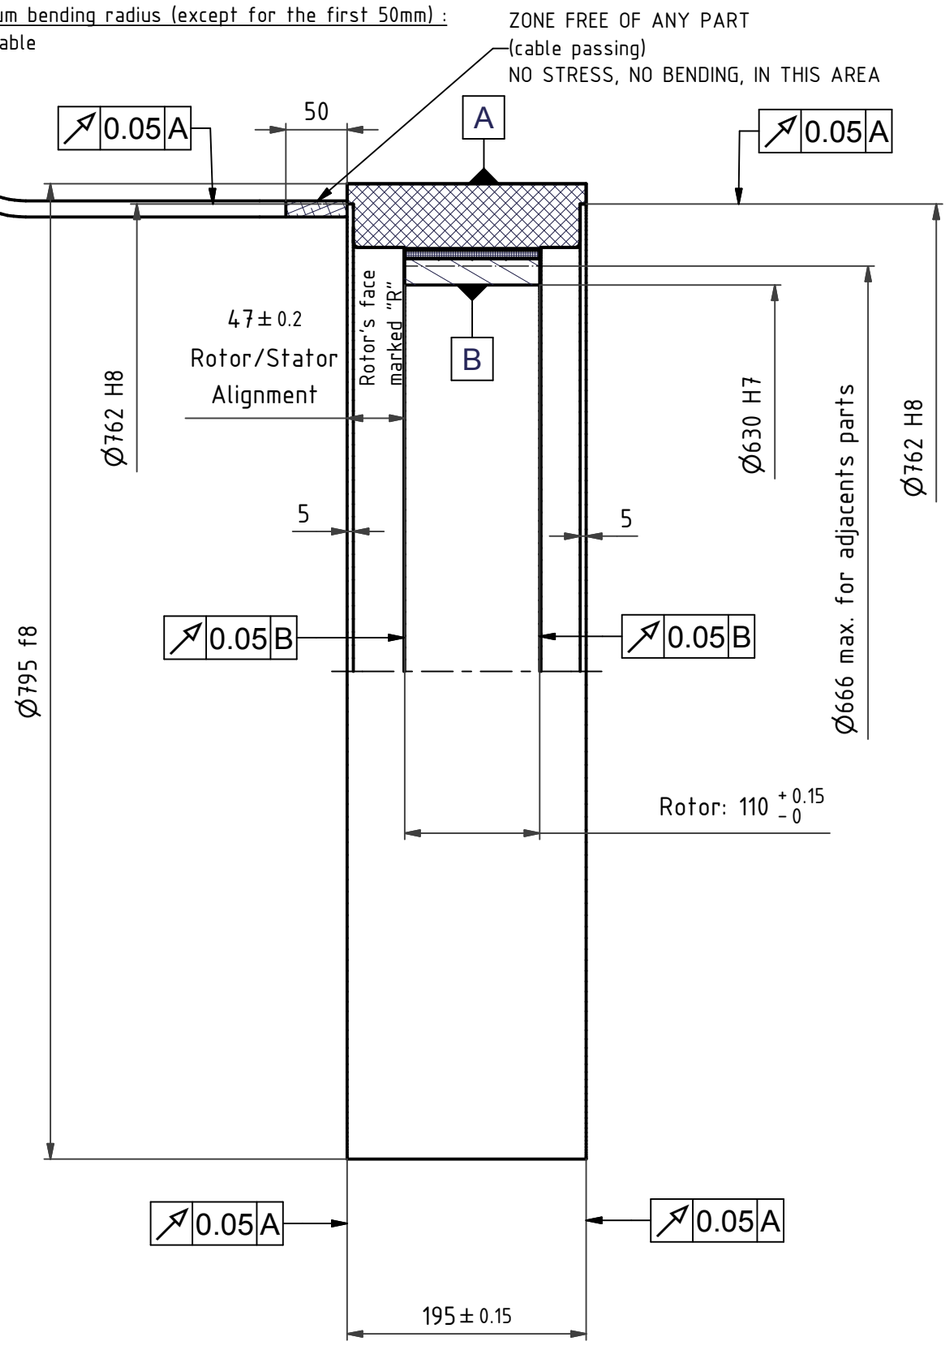

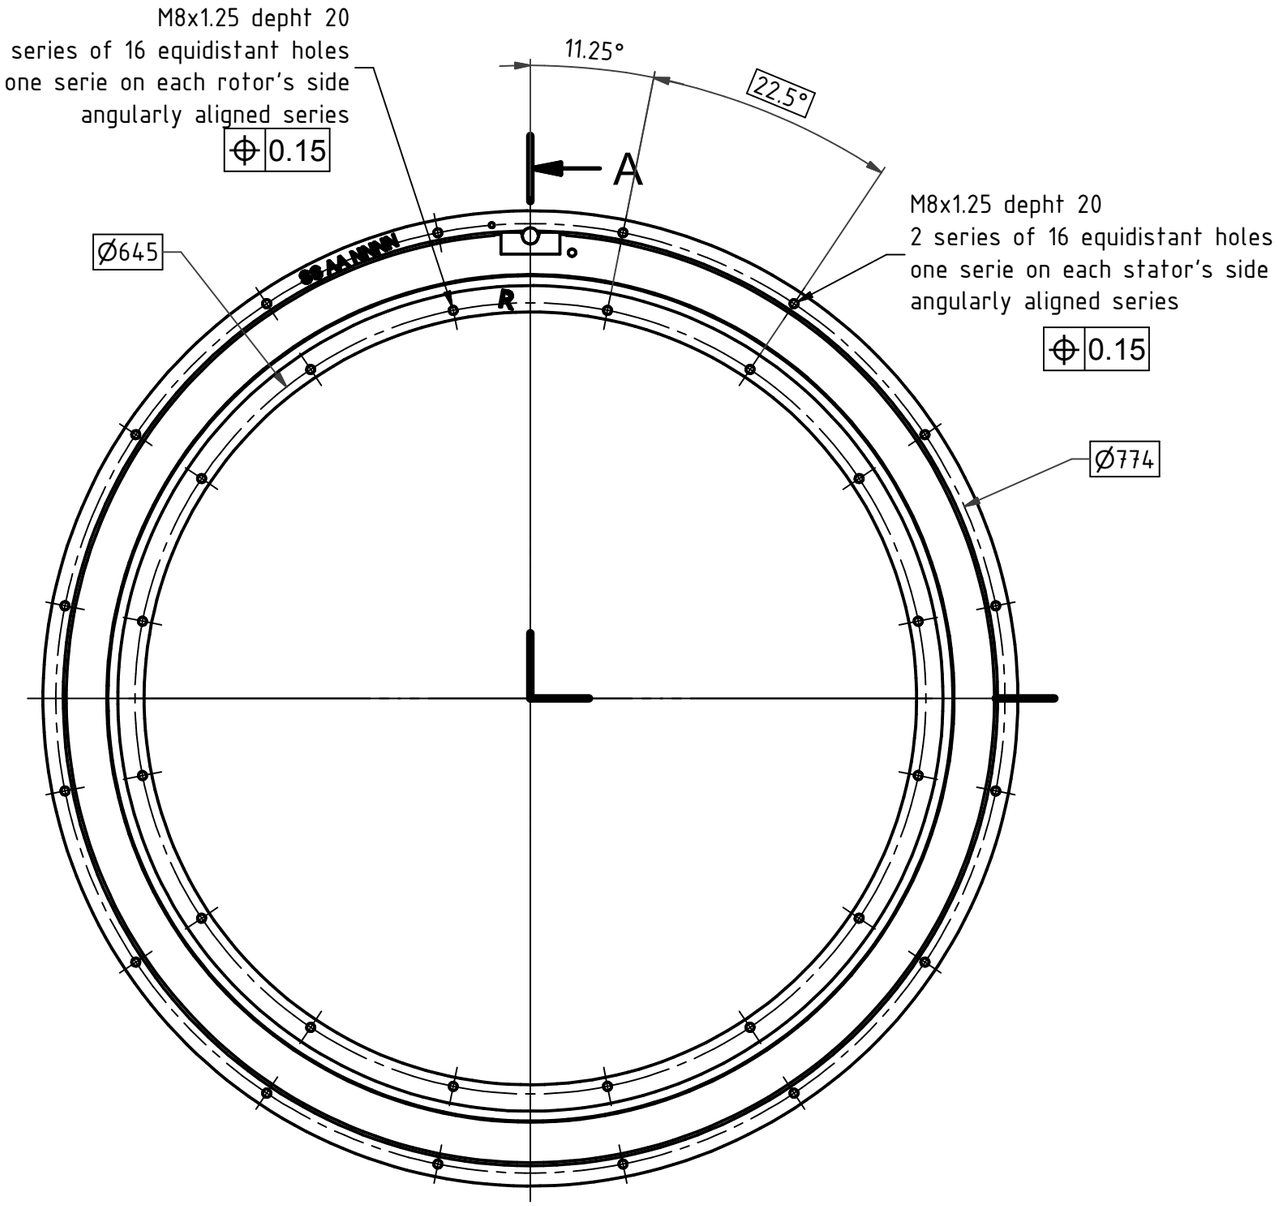

Nota:

This drawing is valid only for alternators with nominal current lower than 53 Amps.
If the nominal current is greater than 53 Amps, please contact us.

ALXION

AUTOMATIQUE & PRODUCTIQUE

Parc Technologique "les Fossés Jean"

92712 COLOMBES Cedex

Tél: 0141306304 - Fax: 0141306136

800ATK4M1XXXXXX