



Cable output length 2m:
 Power :
 One shielded class 6 cable coded 1,2,3 green/yellow
 Thermal sensors :
 One shielded class 6 cable (2x2x0.25mm²)
 Brown-White : PTC
 Green-Yellow : KTY84
 Minimum bending radius (except for the first 50mm) :
 See table

Cable	Ø	R min.
2x2x0.25	7	84
4x1.5	8.6	103
4x2.5	10.8	130
4x4	12.2	147
4x6	14	168
4x10	17.6	211

ZONE FREE OF ANY PART
 (cable passing)
 NO STRESS, NO BENDING, IN THIS AREA

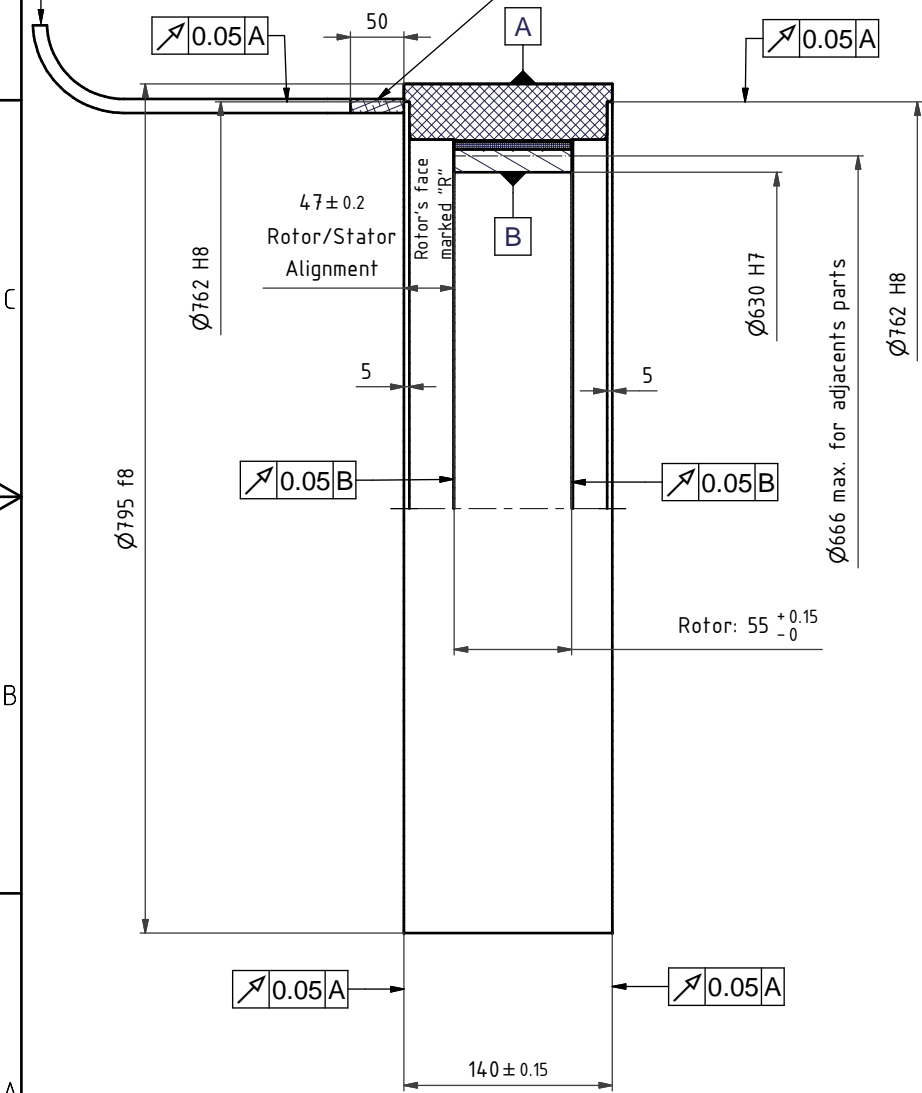

M8x1.25 dept 20
 2 series of 16 equidistant holes
 one serie on each rotor's side
 angularly aligned series

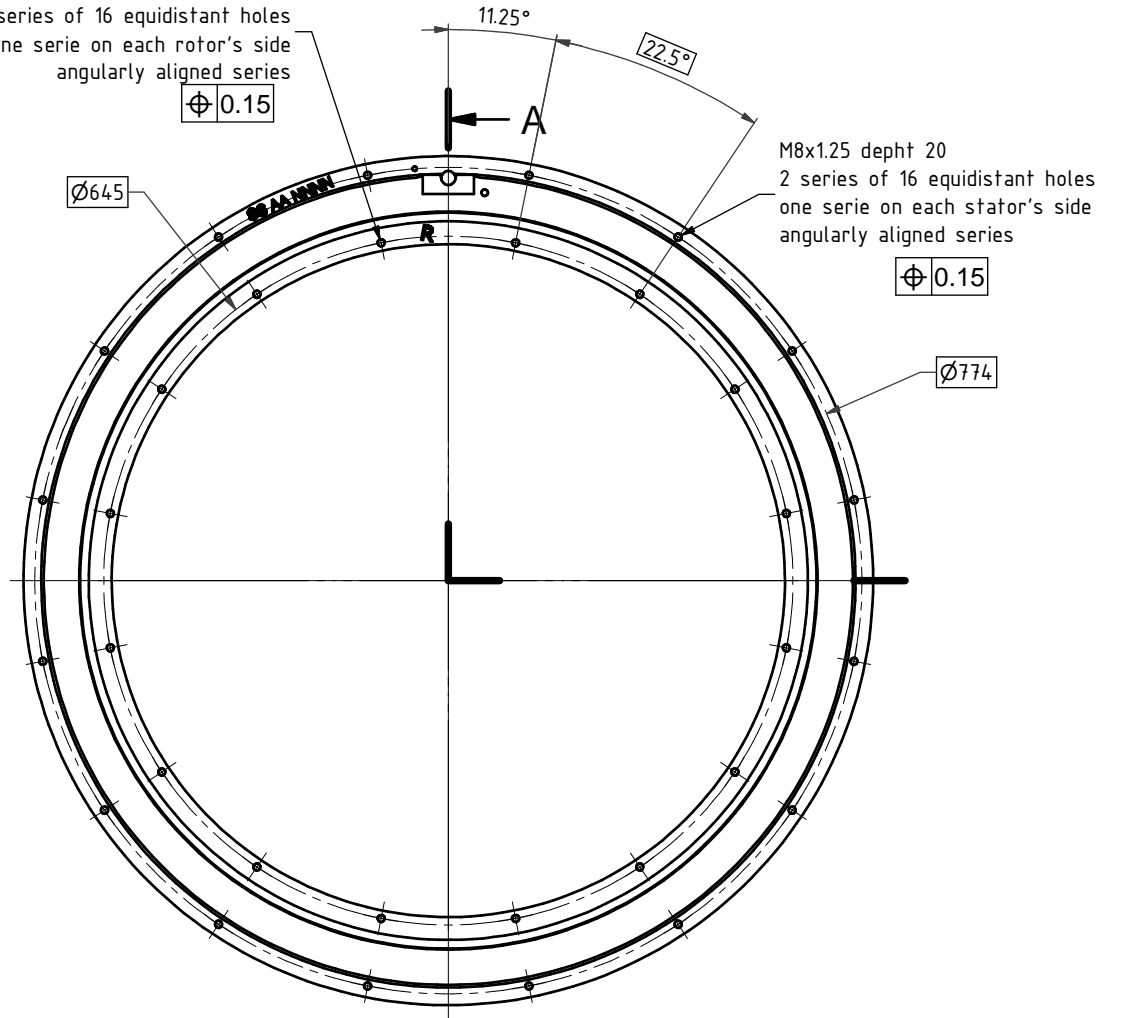

Nota:

This drawing is valid only for motors with nominal current lower than 53 Amps.
 If the nominal current is greater than 53 Amps, please contact us.

ALXION

AUTOMATIQUE & PRODUCTIQUE

Parc Technologique "les Fossés Jean"

92712 COLOMBES Cedex

Tél: 0141306304 - Fax: 0141306136

800STK2M1XXXXXX