

Cable output length 2m:

Power :

One shielded class 6 cable coded 1,2,3 green/yellow

Thermal sensors :

One shielded class 6 cable (2x2x0.25mm²)

Brown-White : PTC



Green-Yellow : KTY84

Minimum bending radius (except for the first 50mm) :

See table

Cable	Ø	R min.
2x2x0.25	7	84
4x1.5	8.6	103
4x2.5	10.8	130
4x4	12.2	147
4x6	14	168
4x10	17.6	211

ZONE FREE OF ANY PART
(cable passing)
NO STRESS, NO BENDING, IN THIS AREA

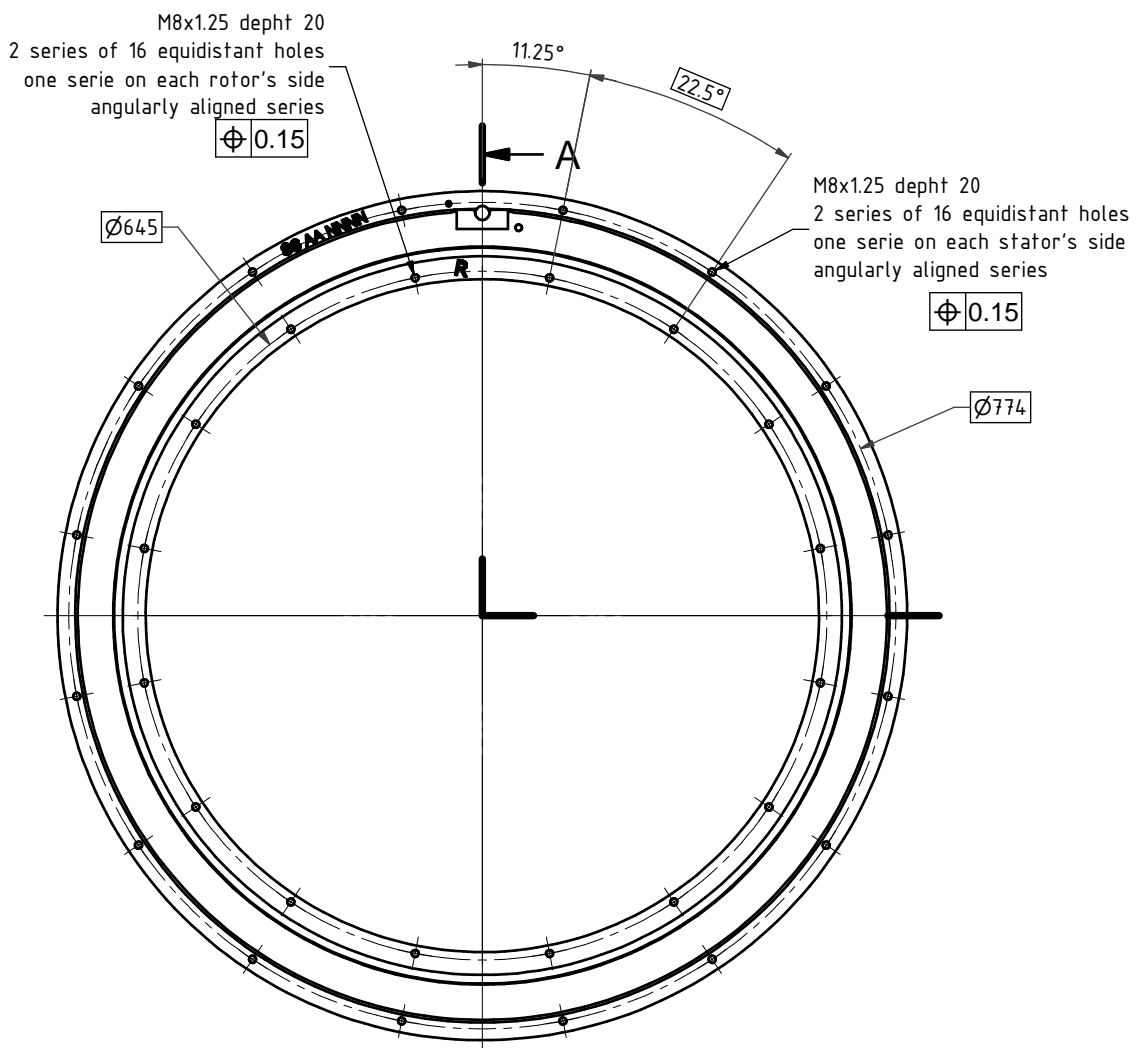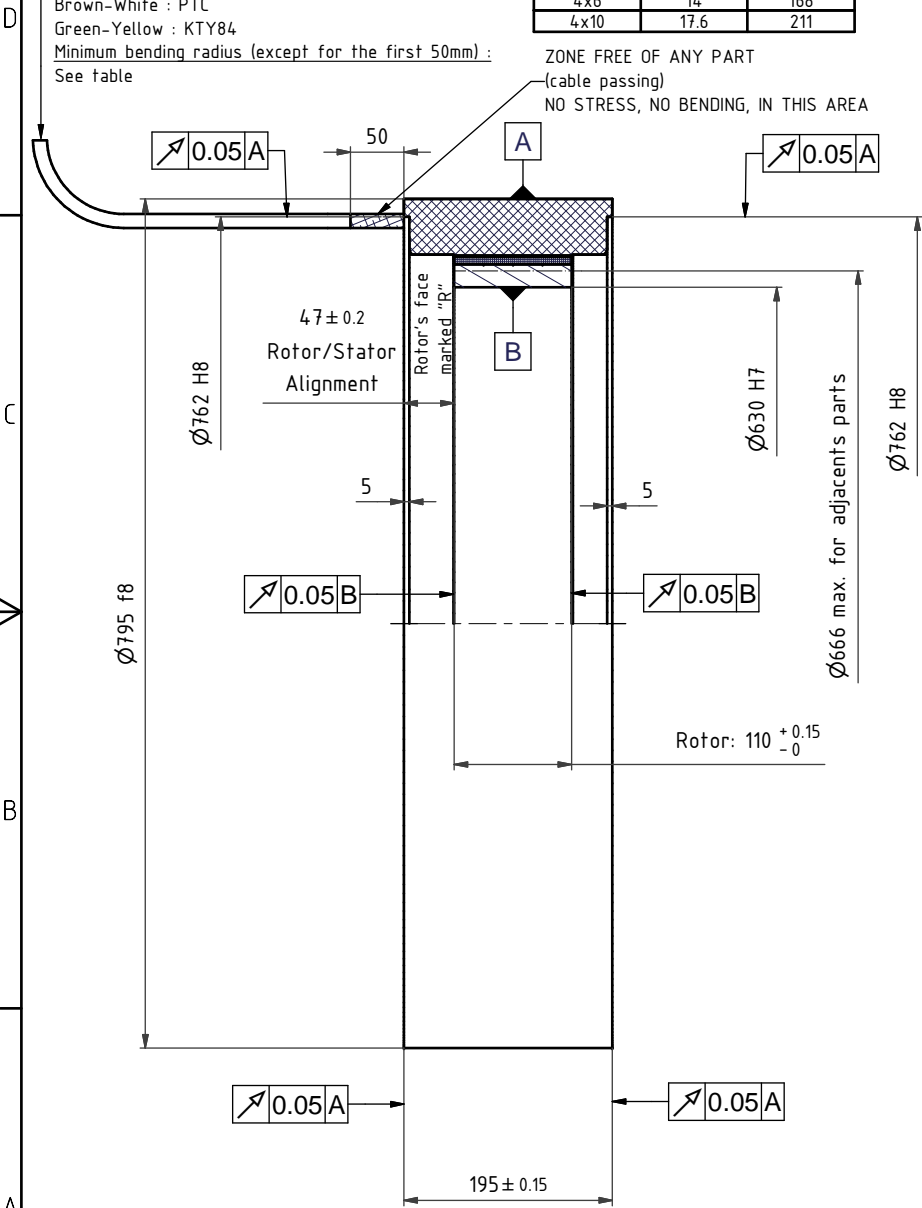

Nota:
This drawing is valid only for motors with nominal current lower than 53 Amps.
If the nominal current is greater than 53 Amps, please contact us.

ALXION
AUTOMATIQUE & PRODUCTIQUE
 Parc Technologique "les Fossés Jean"
 92712 COLOMBES Cedex
 Tél: 0141306304 - Fax: 0141306136

800STK4M1XXXXXX